


Lubricator handling tip – Correct Activation Technique

It is important to use the correct activation technique when installing perma FUTURA lubricators. Please note the tips below:

1.

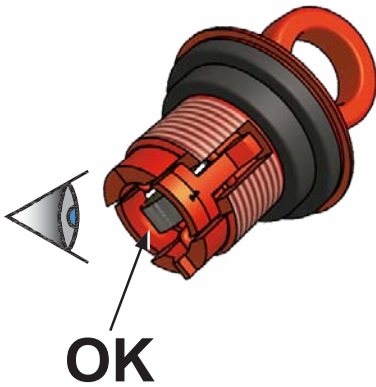

Check that the activator is in good condition and that the activation pellet is in place.

2.



Screw the activator in by hand until it is finger tight.

3.



Using a tool such as the shaft of a screwdriver continue to rotate the activator until the eyelet shears off. **DO NOT** snap the eyelet off by pushing to the side. Use a **ROTATING ACTION ONLY**.

4.



Shake the lubricator and **listen** for the rattle sound of the activator pellet which should now be within the body of the lubricator.